



Martin Mobile Home Up-Flow Mobile Home AUM/AUMT




Features:

- Up-Flow Cooling, Heat Pump, Hydronic Mobile Home Application
- 208/230 VAC Operation
- 2.0 - 5.0 Ton Capacity
- High efficiency Long Life Aluminum or Copper DX Coils
- Attractive, powder coated painted exterior

Optional Features:

- Factory installed TXV
- Optional factory or field installed electric heat
- 3,5,6,8,10,15 o20 kW
- Electric breakers is standard with 15kW and 20kW

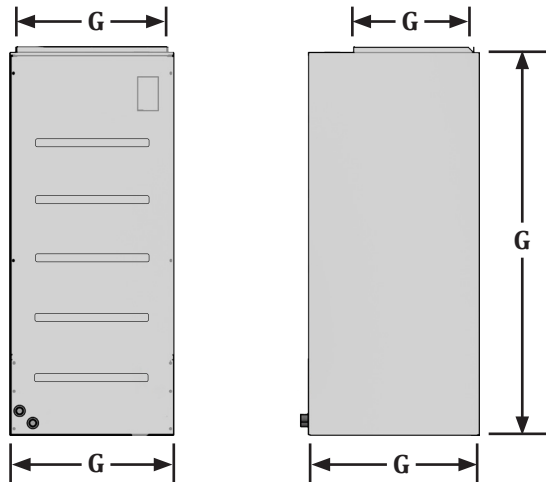

| Cabinet Dimensions | | | | | |
|--------------------|---------------------|--------------------|--------------------|-------------------|-------------------|
| Model | Cabinet Height A | Cabinet Width B | Cabinet Depth C | Supply Width D | Supply Depth E |
| AUM | 52.00" | 19.75" | 24.00" | 20.00" | 19.25" |
| AUMT | 57.00" | 19.75" | 24.00" | 20.00" | 19.25" |

*** Specifications May Change Without Notice

Martin Mobile Home Down-Flow Mobile Home ADM/ADMT




Features:

- Down-Flow Cooling, Heat Pump, Hydronic Mobile Home Application
- 208/230 VAC Operation
- 2.0 - 5.0 Ton Capacity
- High efficiency Long Life Aluminum or Copper DX Coils
- Attractive, powder coated painted exterior

Optional Features:

- Factory installed TXV
- Optional factory or field installed electric heat
 - 3,5,6,8,10,15 or 20 kW
- Electric breakers is standard with 15kW and 20kW

ADM - The filter is on top

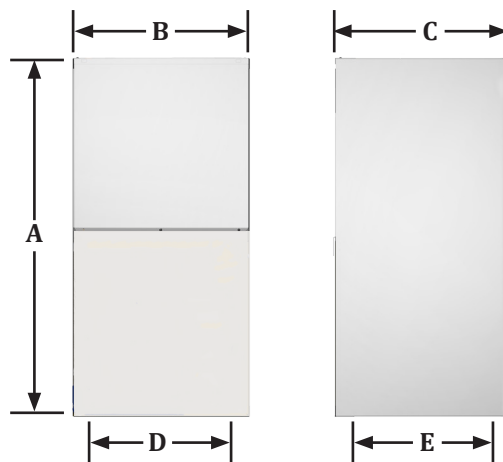

| Cabinet Dimensions | | | | | |
|--------------------|--------------------|-------------------|-------------------|------------------|------------------|
| Model | Cabinet Height - A | Cabinet Width - B | Cabinet Depth - C | Return Width - D | Return Depth - E |
| ADM 2 - 5 | 52.00" | 19.50" | 24.00" | 20.00" | 18.00" |
| ADMT 2 - 5 | 57.00" | 19.50" | 24.00" | 20.00" | 18.00" |


*** Specifications May Change Without Notice

Martin Mobile Home Down-Flow Mobile Home ANDF/ADFM



Features:

- Down-Flow Cooling and Heat Pump Mobile Home Application
- 208/230 VAC Operation
- 3.0 - 5.0 Ton Capacity
- High efficiency Long Life Aluminum or Copper DX Coils
- Attractive, powder coated painted exterior
- Manufactured with dual Filters for better quality air flow
- Factory or field installed heat strips up to 20kW
- Coil and Air Handler are sold separately

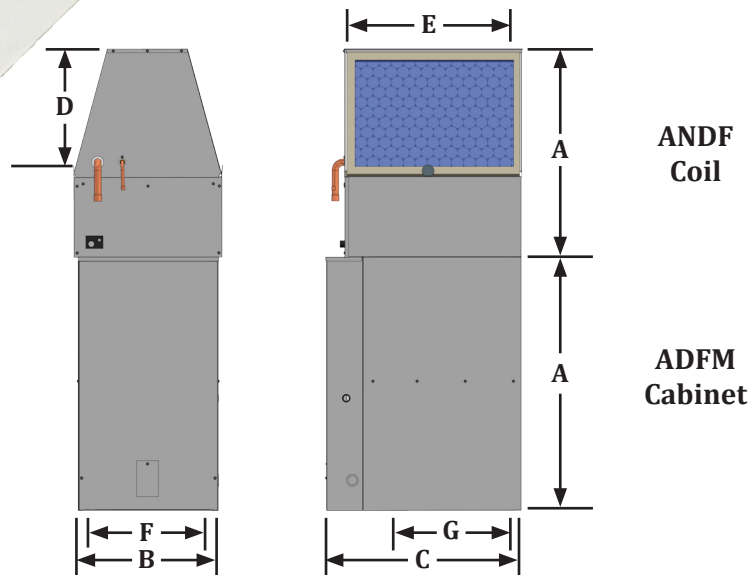

| Cabinet Dimensions | | | | | | | |
|--------------------|---------------------|--------------------|--------------------|-------------------|-------------------|-------------------|-------------------|
| Model | Cabinet Height A | Cabinet Width B | Cabinet Depth C | Return Width D | Return Depth E | Supply Width F | Supply Depth G |
| ADFM 3D - 5D | 29.50" | 19.75" | 23.75" | 20.00" | 20.00" | 15.50" | 16.00" |
| ANDF Coil | | | | | | | |
| ANDF 3 - 5 Tons | 30.00" | 19.75" | 22.00" | 20.00" | 20.00" | 15.50" | 16.00" |

*** Specifications May Change Without Notice

| |
|---|
| Down-Flow Mobile Home Drives |
| ADFM-2D/3D (1/3 HP) |
| *Use ADFM-3D for 2 - 3 Ton Applications* |
| ADFM-4D (1/2 HP) |
| *Use ADFM-4D for 3 - 4 Ton Applications* |
| ADFM-5D (3/4 HP) |
| *Use ADFM-5D for 5 Ton Applications* |

Blower Performance for 1/2 HP

| Model | Speed | External Static Pressure vs. Coil Static Pressure 0.2" W.C.* | | | |
|-------|----------|--|------|------|------|
| | | 0.1 | 0.2 | 0.3 | 0.4 |
| ADFM | High | 1560 | 1550 | 1550 | 1550 |
| | Med - Hi | 1200 | 1220 | 1230 | 1210 |
| | Low | 950 | 1010 | 1000 | 1010 |
| Model | Speed | External Static vs. Coil Static Pressure 0.3" W.C.* | | | |
| | | 0.1 | 0.2 | 0.3 | 0.4 |
| ADFM | High | 1590 | 1550 | 1550 | 1520 |
| | Med - Hi | 1210 | 1200 | 1210 | 1220 |
| | Low | 990 | 980 | 980 | 980 |

Blower Performance for 3/4 HP

| Model | Speed | External Static Pressure vs. Coil Static Pressure 0.2" W.C.* | | | |
|-------|----------|--|------|------|------|
| | | 0.1 | 0.2 | 0.3 | 0.4 |
| ADFM | High | 2030 | 2000 | 1970 | 1950 |
| | Med - Hi | 1560 | 1550 | 1550 | 1550 |
| | Low | 1240 | 1230 | 1220 | 1230 |
| Model | Speed | External Static vs. Coil Static Pressure 0.3" W.C.* | | | |
| | | 0.1 | 0.2 | 0.3 | 0.4 |
| ADFM | High | 1750 | 1750 | 1740 | 1720 |
| | Med - Hi | 1480 | 1470 | 1500 | 1520 |
| | Low | 1140 | 1130 | 1150 | 1150 |